V_{DSS} 30/-30 V
I_D 7.0/-6.0 A
$R_{DS(ON)}$ 15/45 mΩ

General Description

These N+P dual Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.


Features


Fast switching
Green Device Available
Suit for 4.5V Gate Drive Applications

Applications

DC Fan
Motor Drive Applications
Networking
Half / Full Bridge Topology

4606
XXX





MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings Tc=25℃ unless otherwise noted

Symbol	Parameter	Rating		Units
V_{DS}	Drain-Source Voltage	30	-30	V
V_{GS}	Gate-Source Voltage	±20	±20	V
I_D	Drain Current – Continuous (T_C=25℃)	7.0	-6.0	A
	Drain Current – Continuous (T_C=100℃)	4.5	-3.5	A
I_{DM}	Drain Current – Pulsed[1]	21	-18	A
P_D	Power Dissipation (T_C=25℃)	2.5		W
	Power Dissipation – Derate above 25℃	0.02		W/℃
T_{STG}	Storage Temperature Range	-55 to 150		℃
T_J	Operating Junction Temperature Range	-55 to 125		℃

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62.5	℃/W
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	50	℃/W

N-Channel Electrical Characteristics (T_J=25℃ unless otherwise specified)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=250uA	30	---	---	V
I_{DSS}	Drain-Source Leakage Current	V_{DS}=30V , V_{GS}=0V , T_J=25℃	---	---	1	uA
		V_{DS}=24V , V_{GS}=0V , T_J=125℃	---	---	10	uA
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V , V_{DS}=0V	---	---	±100	nA

On Characteristics

$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V , I_D=6A	---	15	22	mΩ
		V_{GS}=4.5V , I_D=5A	---	21	35	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =250uA	1.0	1.5	2.5	V
△$V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	-4	---	mV/℃
gfs	Forward Transconductance	V_{DS}=10V , I_D=3A	---	3	---	S

Dynamic and switching Characteristics

Q_g	Total Gate Charge[3,4]	V_{DS}=15V , V_{GS}=4.5V , I_D=8A	---	4.1	---	nC
Q_{gs}	Gate-Source Charge[3,4]		---	1	---	
Q_{gd}	Gate-Drain Charge[3,4]		---	2.1	---	
$T_{d(on)}$	Turn-On Delay Time[3,4]	V_{DD}=15V , V_{GS}=10V , R_G=6Ω I_D=1A	---	2.8	---	ns
T_r	Rise Time[3,4]		---	7.2	---	
$T_{d(off)}$	Turn-Off Delay Time[3,4]		---	15.8	---	
T_f	Fall Time[3,4]		---	4.6	---	
C_{iss}	Input Capacitance	V_{DS}=25V , V_{GS}=0V , F=1MHz	---	345	---	pF
C_{oss}	Output Capacitance		---	55	---	
C_{rss}	Reverse Transfer Capacitance		---	32	---	
Rg	Gate resistance	V_{GS}=0V, V_{DS}=0V, F=1MHz	---	3.2	---	Ω

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	V_G=V_D=0V , Force Current	---	---	7.0	A
I_{SM}	Pulsed Source Current		---	---	14	A
V_{SD}	Diode Forward Voltage	V_{GS}=0V , I_S=1A , T_J=25℃	---	---	1.2	V

Note :
1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. V_{DD}=25V,V_{GS}=10V,L=0.1mH,I_{AS}=17A.,R_G=25Ω, Starting T_J=25℃.
3. The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%.
4. Essentially independent of operating temperature.

P-Channel Electrical Characteristics (T_J=25℃ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D= -250μA	-30	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}= -30V, V_{GS}=0V,	-	-	-1	μA
I_{GSS}	Gate to Body Leakage Current	V_{DS}=0V, V_{GS}= ±20V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D= -250μA	-1.0	-1.5	-2.5	V
$R_{DS(on)}$	Static Drain-Source on-Resistance note3	V_{GS}= -10V, I_D= -7A	-	18	25	mΩ
		V_{GS}= -4.5V, I_D= -4A	-	28	40	
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS}= -15V, V_{GS}=0V, f=1.0MHz	-	982	-	pF
C_{oss}	Output Capacitance		-	135	-	pF
C_{rss}	Reverse Transfer Capacitance		-	109	-	pF
Q_g	Total Gate Charge	V_{DS}= -15V, I_D= -4A, V_{GS}= -10V	-	10	-	nC
Q_{gs}	Gate-Source Charge		-	2	-	nC
Q_{gd}	Gate-Drain(“Miller”) Charge		-	2.7	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-on Delay Time	V_{DD}= -15V, I_D= -7A, V_{GS}= -10V, R_{GEN}=2.5Ω	-	11	-	ns
t_r	Turn-on Rise Time		-	19	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	45	-	ns
t_f	Turn-off Fall Time		-	26	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	-9	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-28	A
V_{SD}	Drain to Source Diode Forward Voltage	V_{GS}=0V, I_S= -7A	-	-0.8	-1.2	V

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. Pulse Test: Pulse Width≤300μs, Duty Cycle≤2%

RATING AND CHARACTERISTIC CURVES

Typical Performance Characteristics-N

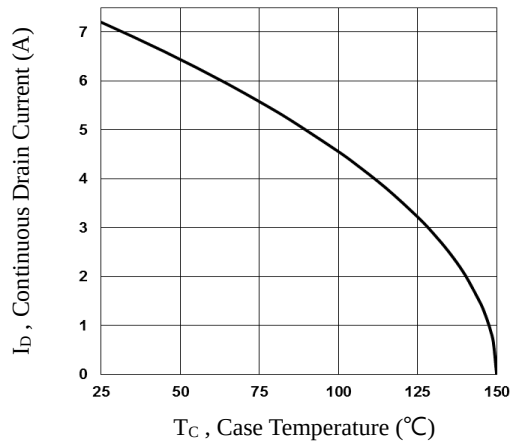


Fig.1 Continuous Drain Current vs. T_C

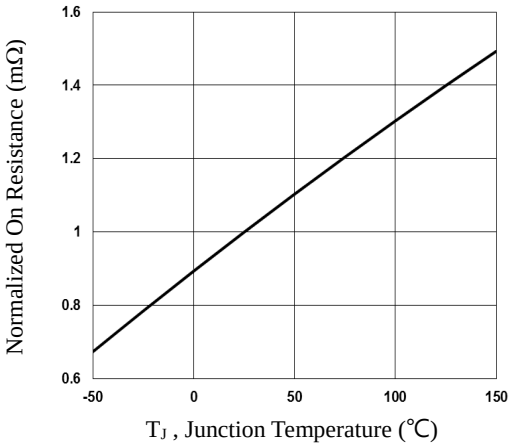


Fig.2 Normalized RDSON vs. T_J

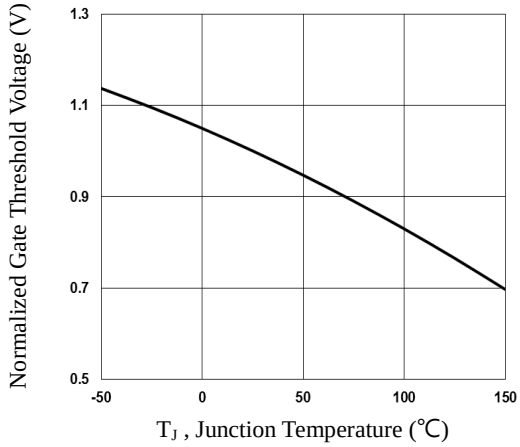


Fig.3 Normalized V_{th} vs. T_J

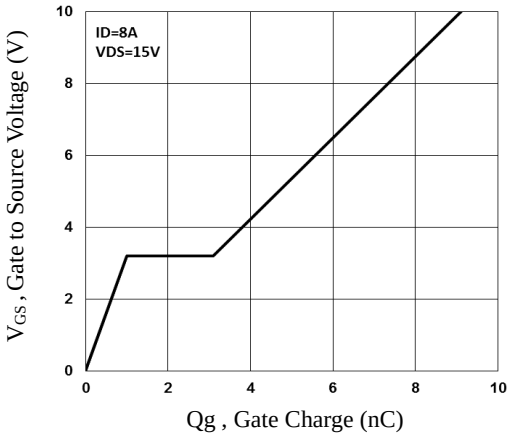


Fig.4 Gate Charge Waveform

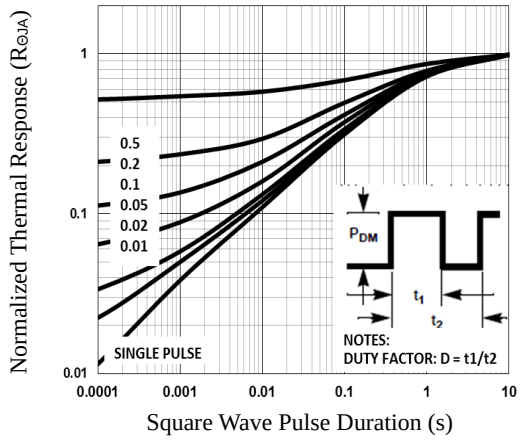


Fig.5 Normalized Transient Response

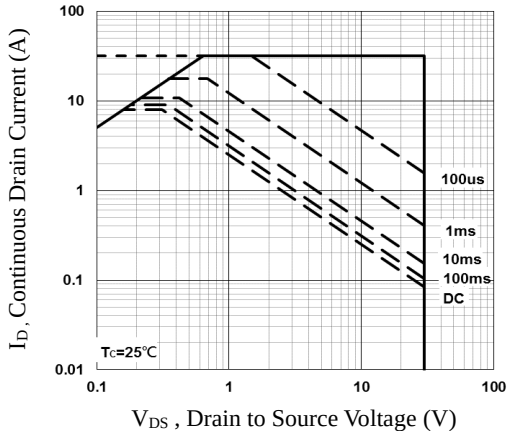


Fig.6 Maximum Safe Operation Area

RATING AND CHARACTERISTIC CURVES

Typical Performance Characteristics-P

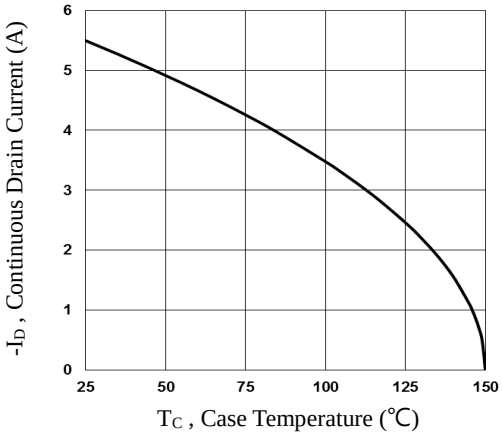


Fig.1 Continuous Drain Current vs. T_C

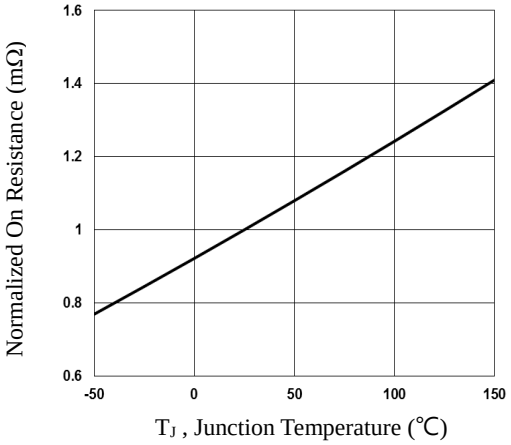


Fig.2 Normalized RDSON vs. T_J

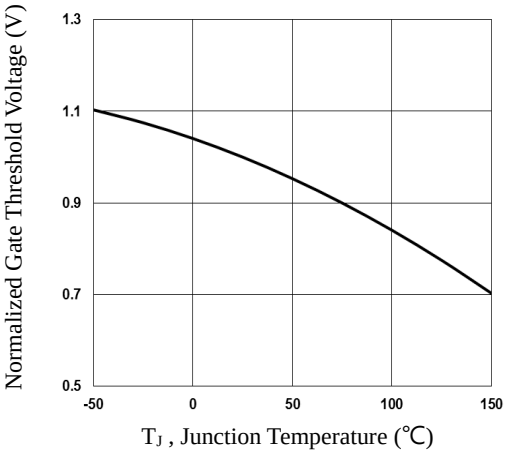


Fig.3 Normalized V_{th} vs. T_J

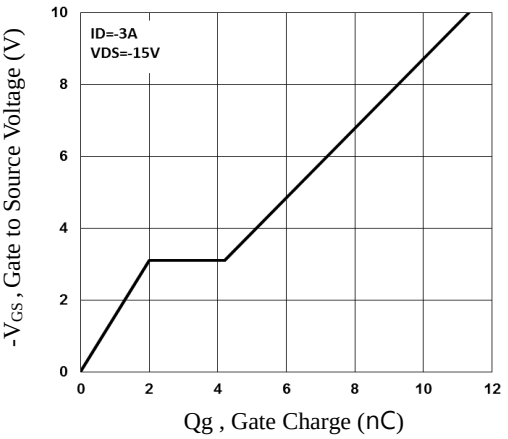


Fig.4 Gate Charge Waveform

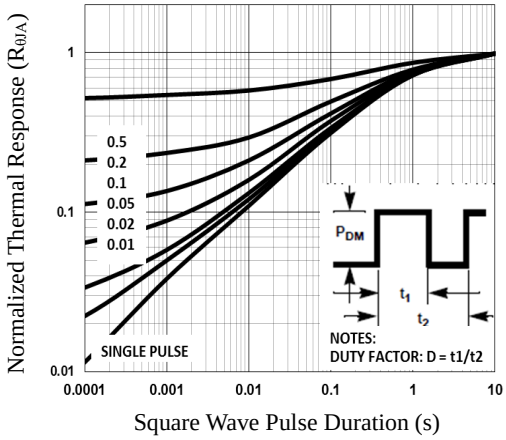


Fig.5 Normalized Transient Impedance


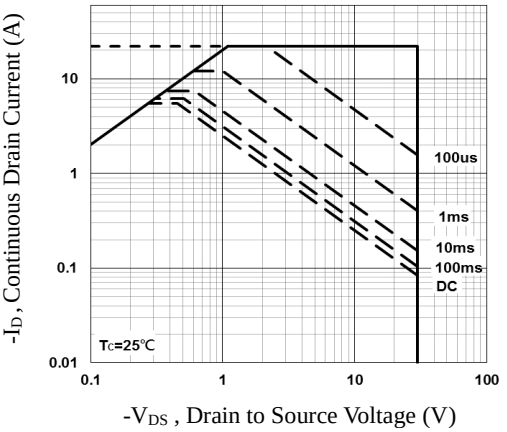


Fig.6 Maximum Safe Operation Area

Soldering parameters


Reflow Condition		Pb-Free assembly (see as bellow)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150℃
	-Temperature Max($T_{s(max)}$)	+200℃
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3℃/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3℃/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217℃
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)℃
Time within 5℃ of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6℃/sec. Max
Time 25℃ to Peak Temp (T_P)		8 min. Max
Do not exceed		+260℃

FIG5: Reflow condition

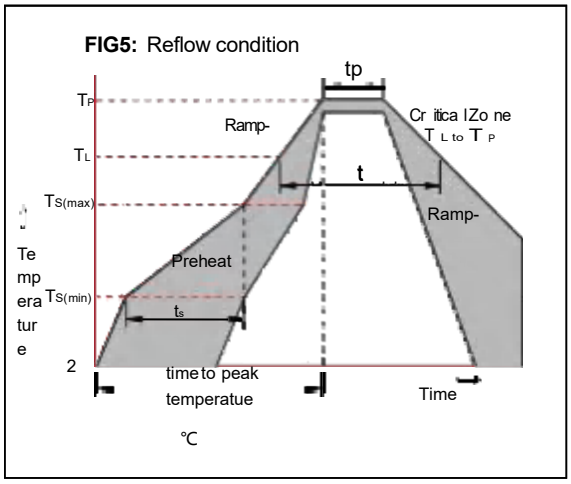


Package Dimensions & Suggested Pad Layout

SOP-8

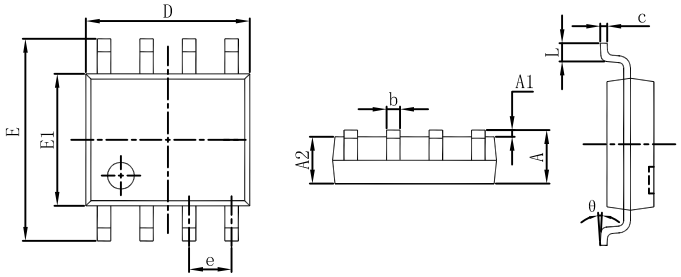


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	**Max**	**Min**	**Max**
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
e	1.270 (BSC)		0.050 (BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

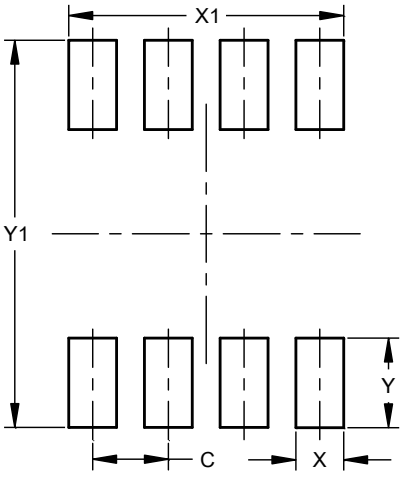

Dimensions	Value (in mm)
C	1.27
X	0.70
X1	4.51
Y	2.00
Y1	7.00


Tape & rell specification

Tape

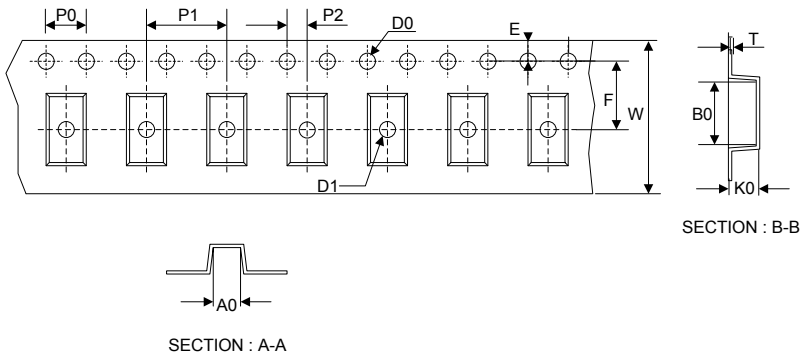


Symbol	Dimension (mm)
P0	4.00±0.20
P1	8.00±0.20
P2	2.00±0.20
D0	1.55±0.20
D1	1.55±0.20
E	1.75±0.15
F	5.50±0.20
W	12.00±0.20
A0	7.00±0.20
B0	5.70±0.20
K0	1.35±0.20
T	0.23±0.20

13” Reel

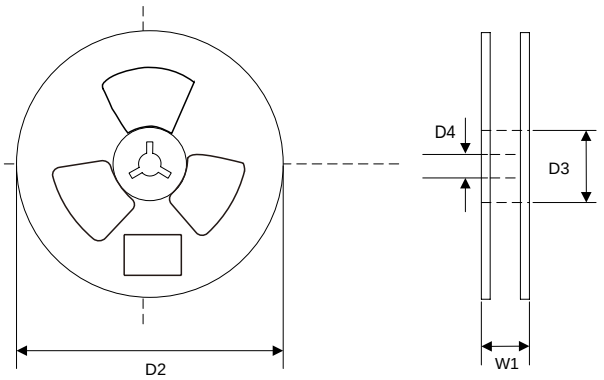

D2	330.0±5.0
D3	73Min.
D4	13.5±2.5
W1	16.0±3.0
Quantity: 3000PCS	

13” Reel

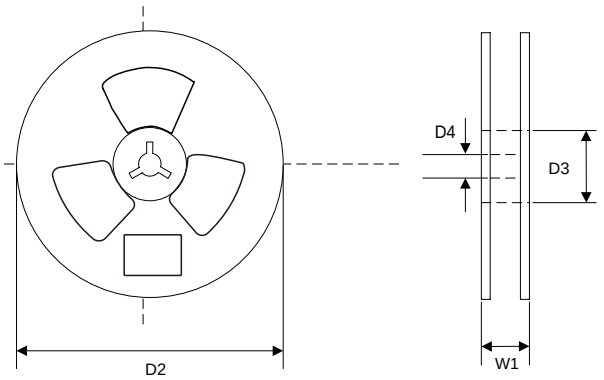

D2	330.0±5.0
D3	73Min.
D4	13.5±2.5
W1	16.0±3.0
Quantity: 4000PCS	