

Descriptions

This is Surface Mount Fast Recovery Rectifiers, Reverse Voltage: 50 to 1000V, Forward Current: 3.0A, SMBF package.

Features

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

Applications

General purpose

Equivalent Circuit & Pinning



PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

SMBF

Absolute Maximum Ratings and Characteristics

Parameter	Symbols	RS3ABF	RS3BBF	RS3DBF	RS3GBF	RS3JBF	RS3KBF	RS3MBF	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T _c = 125 °C	I _{F(AV)}	3							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	80							A
Maximum Forward Voltage at 3 A	V _F	1.3							V
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 125 °C	I _R	5 100							μA
Typical Junction Capacitance at V _R =4V, f= 1 MHz	C _j	40							pF
Maximum Reverse Recovery Time (1)	t _{rr}	150				250	500		ns
Typical Thermal Resistance (2)	R _{θJA} R _{θJC}	45 15							°C/W
Operating and Storage Temperature Range	T _J , T _{stg}	-55 ~ +150							°C

(1) Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{rr} = 0.25\text{A}$.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Electrical Characteristic Curve

Fig.1 Maximum Average Forward Current Rating

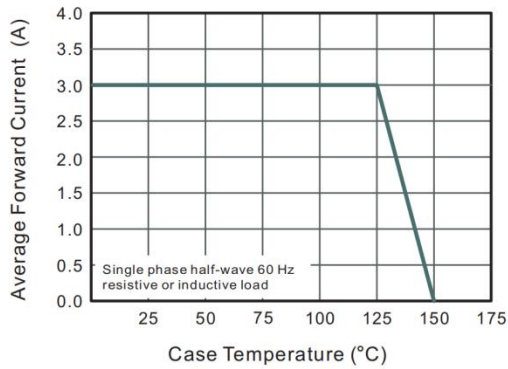


Fig.2 Typical Reverse Characteristics

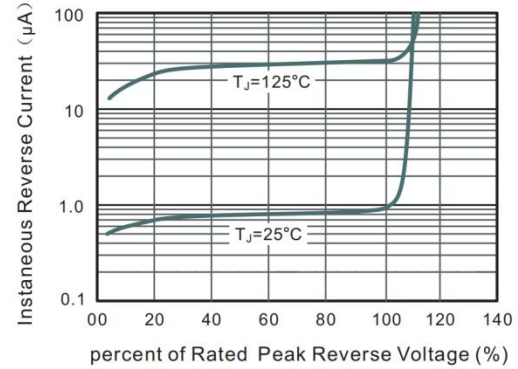


Fig.3 Typical Instantaneous Forward Characteristics

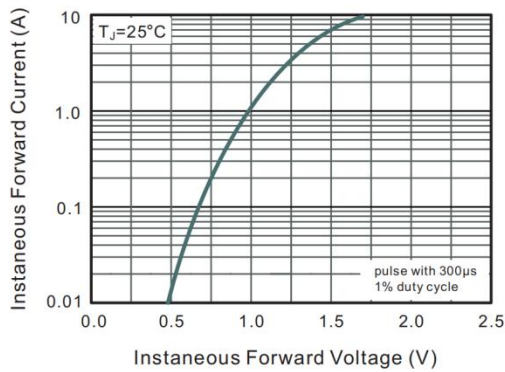


Fig.4 Typical Junction Capacitance



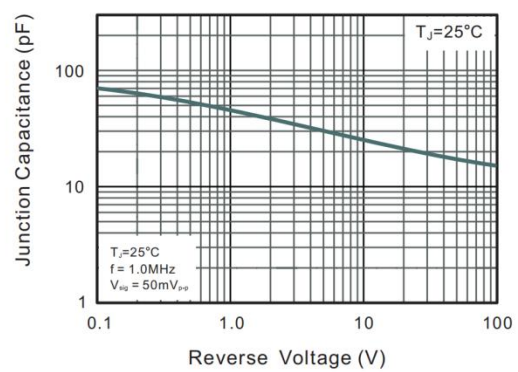


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

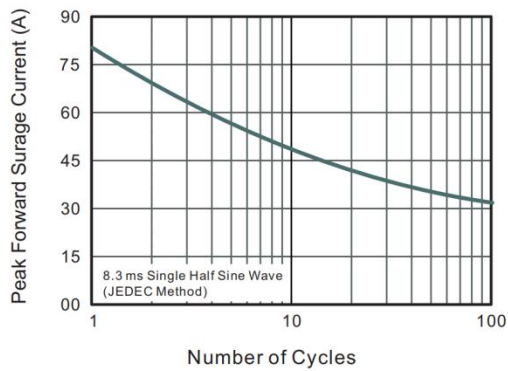

Marking Instructions

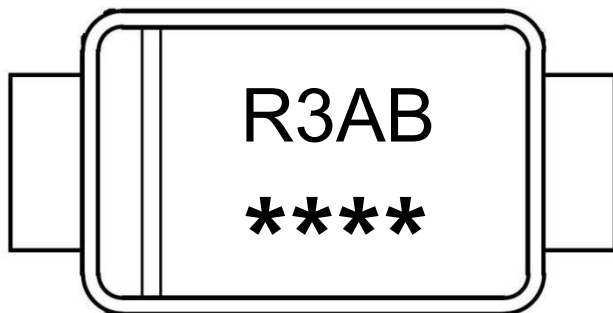

Type number	Marking code
RS3ABF	R3AB
RS3BBF	R3BB
RS3DBF	R3DB
RS3GBF	R3GB
RS3JBF	R3JB
RS3KBF	R3KB
RS3MBF	R3MB

Note:

R3AB: Product Type Code

****: Lot No. Code, The 1st "*" means:YM Code, The last 3 "*" means:little Lot No Code


Packaging SPEC

REEL

Package Type	Units/Reel
SMBF	5000

Package Outline Dimensions

SMBF

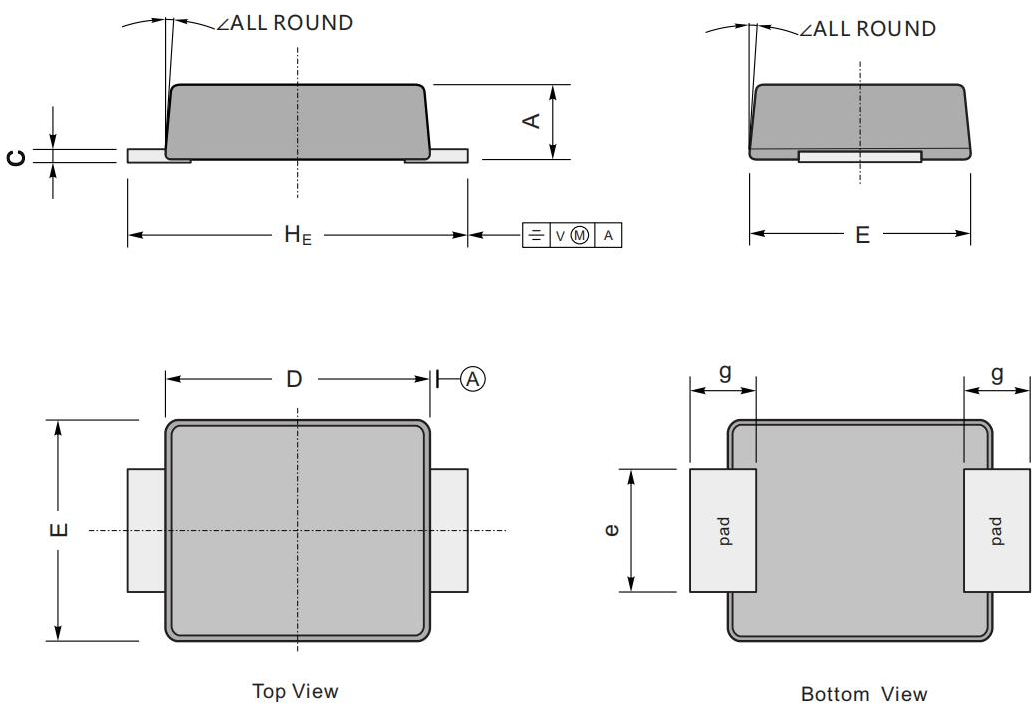

UNIT		A	C	D	E	H _E	e	g	∠
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	max	51	10	173	146	216	86	40	
	min	43	7	165	138	200	75		